

instructions for use

MESH GAZEBO AND ROMAN STRIPS

- The strip is used to shade the specific place and should be used as intended.
- When the summer season end, the strips need to be uninstalled, cleaned, dried and stored in a dry place (the fabric can be washed by hand with a sponge or with pressure washers without using any aggressive detergents).
- The strips are made of factory white PVC mesh based on polyester with 270 g/m² grammage. The material has a B2 certificate for flame retardant materials.
- The strip is not a maintenance-free product. It cannot be used during strong wind.
- The strip must be inspected for damage regularly. A damaged strip cannot be used until it is repaired.
- It is unacceptable for any objects to be placed on the surface of strips. They need to be removed immediately because they might fall down on a random place.
- The strips should be fitted in a place that allows them for drying up completely or being dried during use. If the strip is interlaced through the structure's crossbeams, one has to bear in mind that the fabric may become more dirty in the place of contact between the strip and the beams.

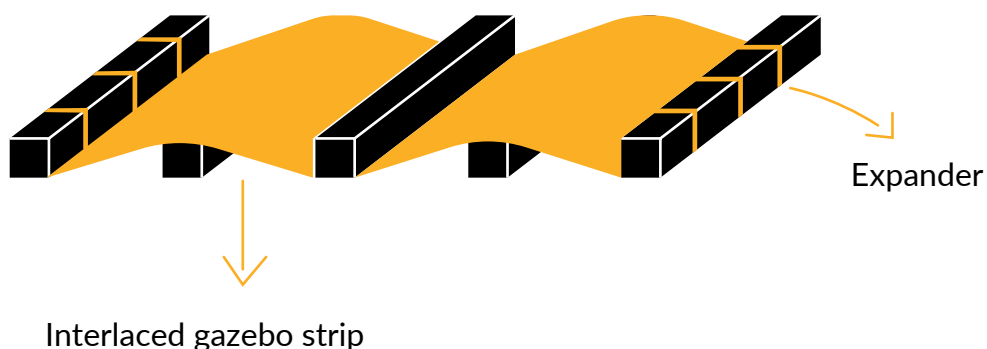


Figure 2. Proposed way of strip installation.



SCAN THE QR CODE and WATCH
THE INSTRUCTIONAL VIDEO ON



Instructions for use


MESH GAZEBO AND ROMAN STRIPS

SUGGESTION FOR INSTALLATION:

1. Unfold the strips flat with the front side facing up, under place point where they are to be hung.
2. Interlace through the beams as showed in Figure 2 (interlace successive strips next to each other, starting alternately at the top and bottom of the beam as showed in fig. 1).
3. Fasten the ends of the strips to the structure using snap rings (see the instructional video).
4. If the strip tension is too low – change the positions of the mounting points.

Purchase the installation kit!

sample installation kits include:

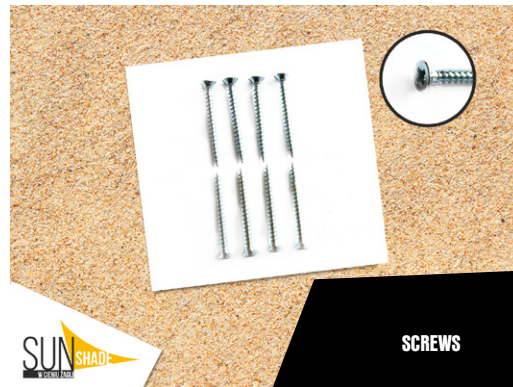

Fitting accessories:

- expander
- screws
- pad eye plate
- sail snap ring

Haven't you found a proper set?
Are you looking for a wall, metal or
another fixing?
Ask the advisor!



Quick contact phone: 518 537 385