

instructions for use

**PREMIUM DECOR GAZEBO AND ROMAN STRIPS**



Figure 1. Gazebo/Roman strips of Premium Decor fabric

- The strip is designed to shade the specific place and should be used as intended.
- When the summer season ends, the strips need to be uninstalled, washed, dried and stored in a dry place (the fabric can be washed by hand or in a washing machine at 30°C without spinning and without using any aggressive detergents).



- The strips are made of Premium Decor 100% polyester textile with 200g/m<sup>2</sup> grammage, which is impregnated on its back side, so the fabric can also protect against light rain. Since the fabric has the front and the reverse side, it has to be mounted with the front side facing the sun.
- The material can discolour up to 8% per year.
- The strip is not a maintenance-free product. It cannot be exposed to strong wind and should be disassembled, especially when its surface is large.
- The strip must be inspected for damage regularly. A damaged strip cannot be used until it is repaired.
- It is unacceptable for any objects to be placed on the surface of strips. They need to be removed immediately because they might fall down on a random place.
- The strips should be fitted in a place that allows them for drying up completely or being dried during use. If the strip is interlaced through the structure's crossbeams, one has to bear in mind that the fabric may become more dirty in the place of contact between the strip and the beams. Please remember that any residual water on the surface of strips is unacceptable. If there is no other option, water has to be removed manually.

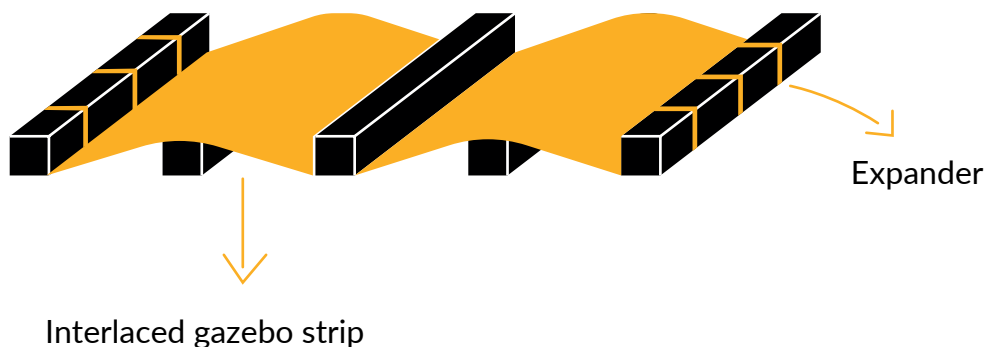


Figure 2. Proposed way of strip installation.



SCAN THE QR CODE and WATCH  
THE INSTRUCTIONAL VIDEO ON



Instructions for use

## PREMIUM DECOR GAZEBO AND ROMAN STRIPS

### SUGGESTION FOR INSTALLATION:

1. Unfold the strips flat with the front side facing up, under place point where they are to be hung.
2. Interlace through the beams as shown in Figure 2 (interlace successive strips next to each other, starting alternately at the top and bottom of the beam as showed in fig. 1).
3. Fasten the ends of the strips to the structure using snap rings (see the instructional video).
4. If the strip tension is too low – change the positions of the mounting points.

Purchase the installation kit!

sample installation kits include:



Fitting accessories:

- expander
- screws
- pad eye plate
- sail snap ring

Haven't you found a proper set?  
Are you looking for a wall, metal or  
another fixing?  
Ask the advisor!



Quick contact phone: 518 537 385