

## PREMIUM DECOR CORNER-FITTED SUN SAILS

- The sun sail is used to shade the specific place and should be used as intended.
- When the summer season ends, the sun sails should be uninstalled, washed, dried and stored in a dry place (the fabric can be washed by hand or in a washing machine at 30°C without spinning and without using any aggressive detergents).



- The sun sails are made of Premium Decor 100% polyester textile with 200g/m<sup>2</sup> grammage, which is impregnated on its back side, so the fabric can also protect against light rain. Since the fabric has the front and the reverse side, it has to be mounted with the front side facing the sun.
- The material can discolour up to 8% per year.
- The sun sail is not a maintenance-free product. It cannot be exposed to strong wind and should be disassembled, especially when its surface is large.
- The sun sail must be inspected for damage regularly. A damaged sun sail cannot be used until it is repaired.
- It is unacceptable for any objects to be placed on the surface of the sun sail. They need to be removed immediately because they might fall down on a random place.
- The sun sail should be fitted in a place that allows it for drying up completely or being dried during use.
- The sun sail can be installed depending on the aesthetic concept of the site of fitting (Fig. 1.). However, remember that any residual water on the surface of sun sail is unacceptable.

The sun sail can be installed in a way preventing accumulation of water on the surface of the sun sail. !

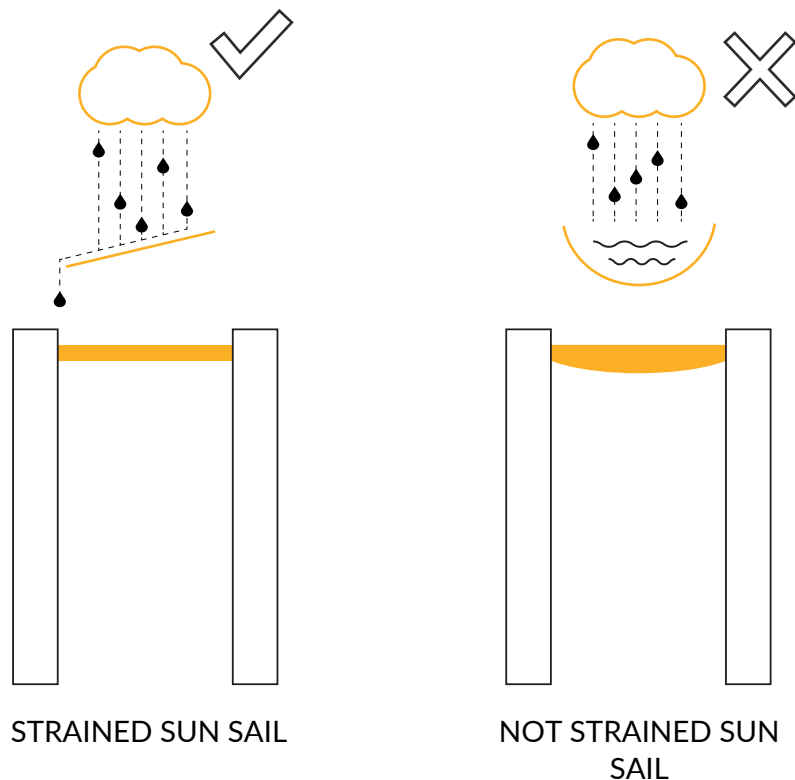


Figure 1. Possible ways of installing the sun sail



instructions for use

**PREMIUM DECOR CORNER-FITTED SUN SAILS**

**SUGGESTION FOR INSTALLATION:**

1. Unfold the sun sail flat with the front side facing up, under place point where it is to be hung.
2. Fix all the corners of the sun sail with snap rings at the previously prepared mounting points (if the sun sail is too small, adjust the distance from the sun sail to the mounting point using, for instance, the ropes available in the optional installation kit) in accordance with the instructional video.
3. Install additional fitting points if the sun sail is equipped with such.
4. Start stretching (e.g. with the bottle screw available in the optional installation kit) the sun sail until the edges of the sun sail are tensioned.
5. Strain the steel rope (available as an option) sewn around the sail without causing excessive tension.

Purchase the installation kit!

sample installation kits include:



**SQUARE/RECTANGLE  
FOR WOOD**



**TRIANGLE  
FOR WOOD**

**square/rectangle for wood**

- steel rope 4 sections x 2 m
- bottle screws for tensioning x 2 pcs
- steel rope clamps x 8 pcs
- sail snap rings x 10 pcs
- pad eye plates x 4 pcs
- screws for wood x 8 pcs

**triangle for wood**

- steel rope 3 sections x 2 m
- bottle screw for tensioning x 1 pcs
- steel rope clamps x 6 pcs
- sail snap ring x 8 pcs
- pad eye plates x 3 pcs
- screws for wood x 6 pcs

Haven't you found a proper set?  
Are you looking for a wall, metal or  
another fixing?  
Ask the advisor!



Quick contact phone: 518 537 385